



# SUNTRONIC

## Outdoor LCD Signage

### Model: U5500L

55" LCD Signage Monitor with  
High Bright LED Enhanced Direct Type Backlight


#### SPECIFICATIONS:

<b>LCD panel</b>	55" TFT-LCD
<b>Display Size</b>	1209.60(H) x 680.40(V) (54.6" diagonal)
<b>Resolution</b>	1920 x 1080 RGB
<b>Pixel Pitch</b>	0.21(H) x 0.63(V)
<b>Color</b>	16.7 M
<b>Horizontal Freq.</b>	60KHz ~ 80KHz
<b>Vertical Freq.</b>	50Hz /60Hz frame rate
<b>Brightness</b>	<b>1200 nits</b> , LED Array backlight enhanced
<b>High Contrast</b>	1800 : 1 Dynamic contrast ratio: 7200:1
<b>Dimming</b>	Auto dimming by light sensor
<b>Viewing Angle</b>	88/88/88/88
<b>Color Gamut</b>	72% NTSC
<b>Response Time</b>	6.5ms
<b>Interface</b>	VGA (round connector IP66), DVI or HDMI
<b>Video System</b>	PAL/SECAM/NTSC-3.58, NTSC-4.43, PAL-60 (reserved for internal media player) media player with Ethernet and WiFi (option) S-Video (round connector IP66)
<b>Media player</b>	Support for full OSD features
<b>Video In</b>	AC 100 ~ 240V 60/50Hz
<b>Remote control</b>	912 Watt for complete monitor
<b>Operate Voltage</b>	25 W or less
<b>Power Consumption</b>	Alu block milled front, Alu sheet folded backcover, IP65
<b>Stand by mode</b>	4--6mm Vandal glass at the front
<b>Enclosure</b>	AC Power Cord, Remote Control.
<b>Protection</b>	VGA cable x 1, S-Video cable x 1
<b>Accessories</b>	Operating temperature -10 ~ 45C
<b>Environmental</b>	Operating Humidity 10% ~ 85%
	Storage temperature -20 ~ 60C
	Storage Humidity 5% ~ 95%

# Model: U5500L

55" LCD Signage Monitor with High Bright LED Enhanced Direct Type Backlight

## MECHANICAL DRAWING:

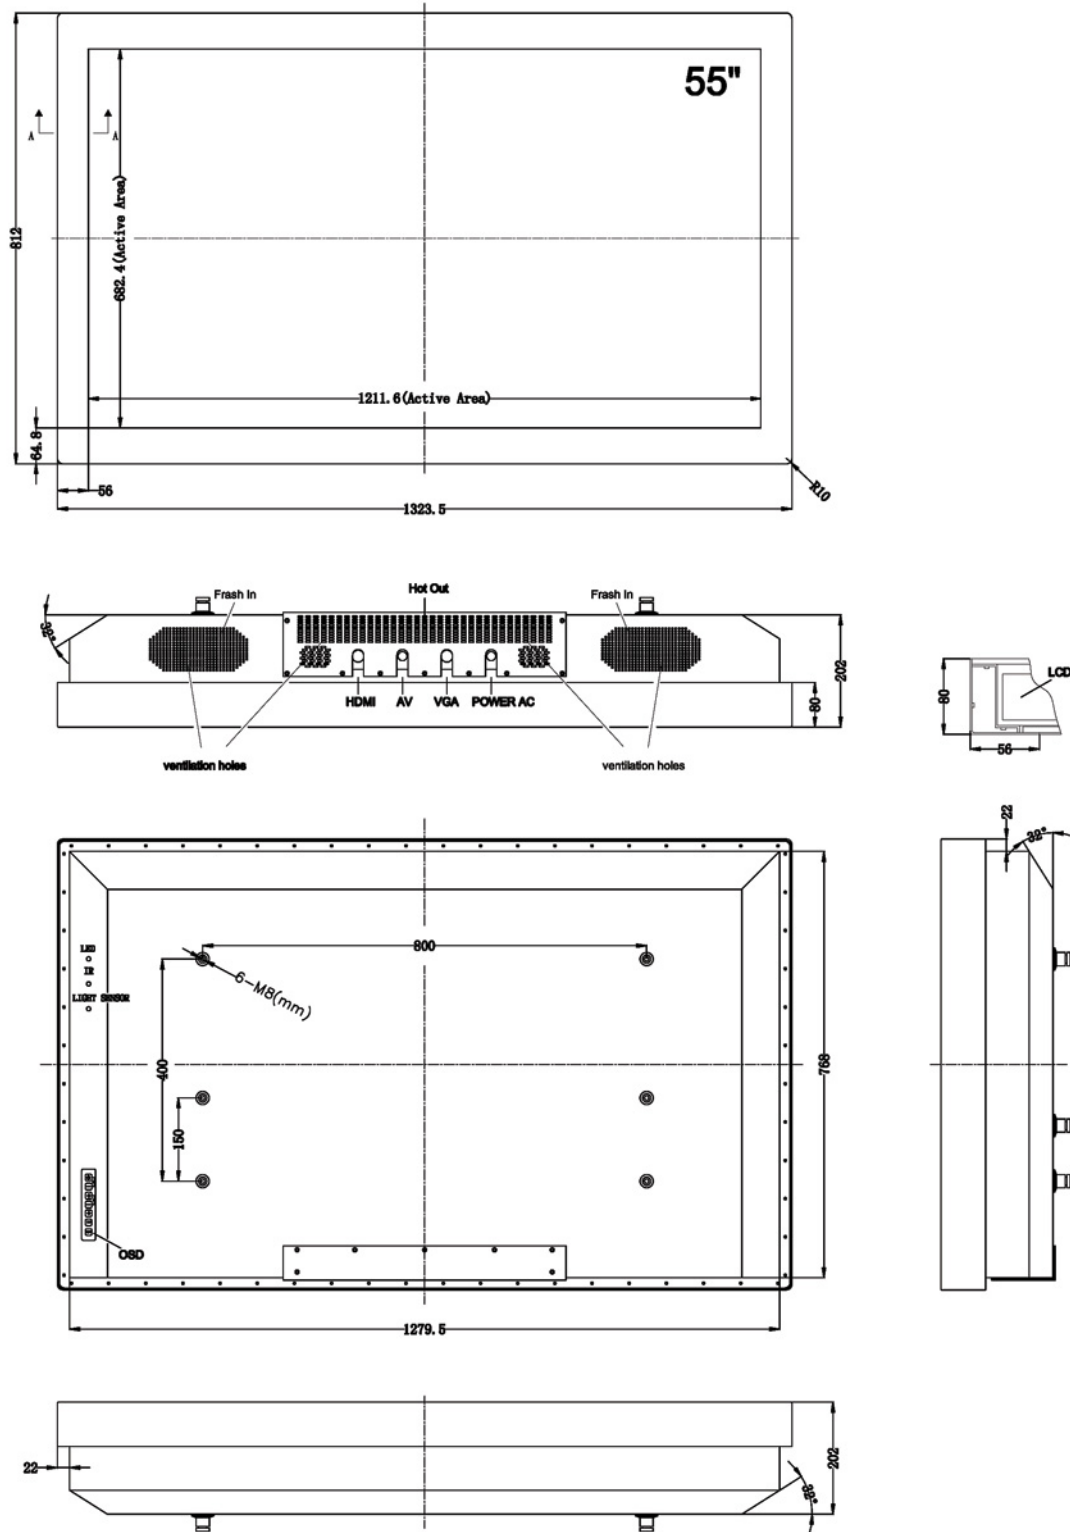

# Model: U5500

55" LCD Digital Signage Monitor with  
High Bright LED Enhanced Direct Type Backlight

## MECHANICAL DRAWING:

