

All Weather Outdoor Kiosk Stand NEMA4 High Brightness LCD Wide Temp (-40 to 122F)

Kiosk Stand Model: SP4600



Suntronic's All Weather Outdoor Kiosk Stand SP4600 is a Full-Sun environment Sunlight Readable LCD monitors that allow you to view the display under the full sunlight. These affordable solutions are ready to deploy to any indoor and outdoor digital signage application for retails stores, restaurants, gas stations and many more...

We produce the largest and brightest Sunlight Readable LCD Monitor in Sizes from 32" to 65"

Features Highlight

- High-Brightness LCD Panel
- All Weather Proof IP65 Enclosures
- Operating Temperature -40C To 50C*
- Integrated heater and air conditioner
- Slim Bezel Thickness 18mm only
- Vandal Resistant Screen & housing
- Unique Front Access Design
- Remote Reboot/Temp.& Humidity Monitoring available (Optional)
- Wireless and VGA/DVI CAT5 signal extenders available (Optional)

Technical Specifications

Active area size (W x H)	: 46" (1018.353 x 572.544 mm)
Pixel pitch (mm)	: 0.2485(H) x 0.7455(V)
Panel resolution (pixels)	: 1366 x 768
Luminance of white (Brightness)	: 1500 nits (Typ) (Optional 3000nits)
Contrast ratio	: 3000:1
Response time (gtg)	: 8 ms (Typ)
Colour Range	: 16.7 Million colours (max)
Viewing angle	: 89/89/89/89
Video inputs	: VGA; HDMI; S-Video
Auto Brightness Control	: Yes (Optional)
Front glass type	: Strengthen 6mm AR glass
IP Class	: IP65
Operating temperature range	: -40 to + 95F (Direct Sunlight) /122F (Under Shaded Area)
Storage Temperature	: 0 to 50C
CCFL Life Time	: 60K hrs (min)
Input voltage	: 110V
Weight	: 70kg/195lbs
External dimensions (W x H x D)	: 1056 x 610 x 249 mm Notes: to guarantee a proper functionality, 10cm of clearance must be kept around the display (41.6" W x 24" H x 9.81" D)
Portrait version	: Please contact I-Tech for details
Available Accessories	: IR Remote Control and VGA cable (included)and Ethernet Cable (not included)
Options	: Custom Embedded PCs (please call for enquiries)
Customization	: Please contact SuntronicLCD for available options



Photos



Front View



ISO Front View







Side View



Back View

Mechanical Drawings

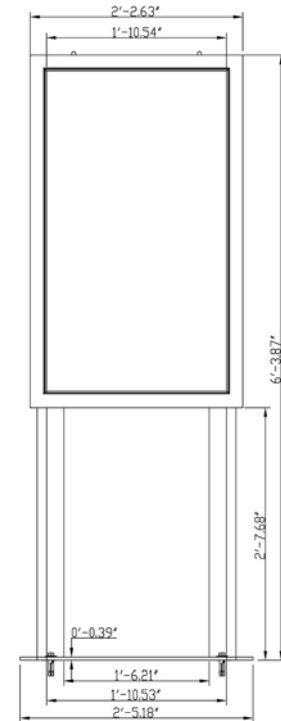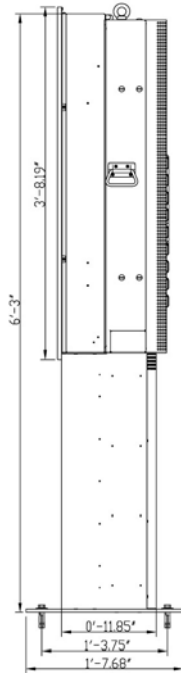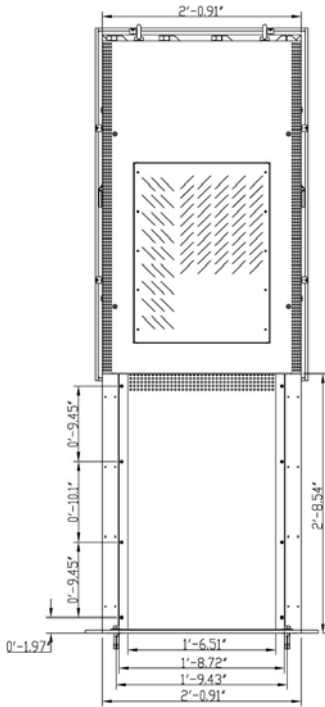

MARK/DITY	ECD NO.	DESCRIPTION	ZONE	EDITED DATE	APPD	DATE	REV
APPROVALS	BY	DATE					
DRAWN							
DESIGNED							
EDITED							
MFG							
CHECKED							
APPROVED							
		THIS DRAWING AND DESIGN ARE THE PROPERTY OF SUNTRONIC, INC. THESE ARE SUBMITTED ON THE CONDITION THAT THESE ARE NOT TO BE REPRODUCED OR COPIED IN WHOLE OR IN PART, OR USED FOR ANY OTHER PURPOSE, WITHOUT THE WRITTEN PERMISSION OF SUNTRONIC, INC.	 SUNTRONIC Outdoor LCD Signage 10-100 2ND ST 100-100 2ND ST		REV	DATE	REV
		UNLESS OTHERWISE SPECIFIED TOLERANCES AS FOLLOWS DIMENSIONS IN IN. $\frac{1}{16}$ DECIMALS Δ ALL DIMENSIONS ARE IN UNLESS OTHERWISE SPECIFIED DO NOT SCALE DRAWING	REFERENCE DRAWING NO. 0000-0000-0000		APR	A2	
			WEIGHT NR		DO	1:1	
			SHEET 1 OF 1				



EMAIL: Sales@suntroniclcd.com • WEB: www.SuntronicLCD.com