SUNTRONIC
Outdoor LCD Signage

GSCAT5-DVI

The DVX-200 extends any DVI-D signal up to 220 feet with a single CAT6 cable.

The GSCAT5-DVI can extend any DVI-I signal up to 220 ft with a single CAT6 cable, while retaining a perfectly clear, crisp image quality of up to 1600 x 1200 in resolution..
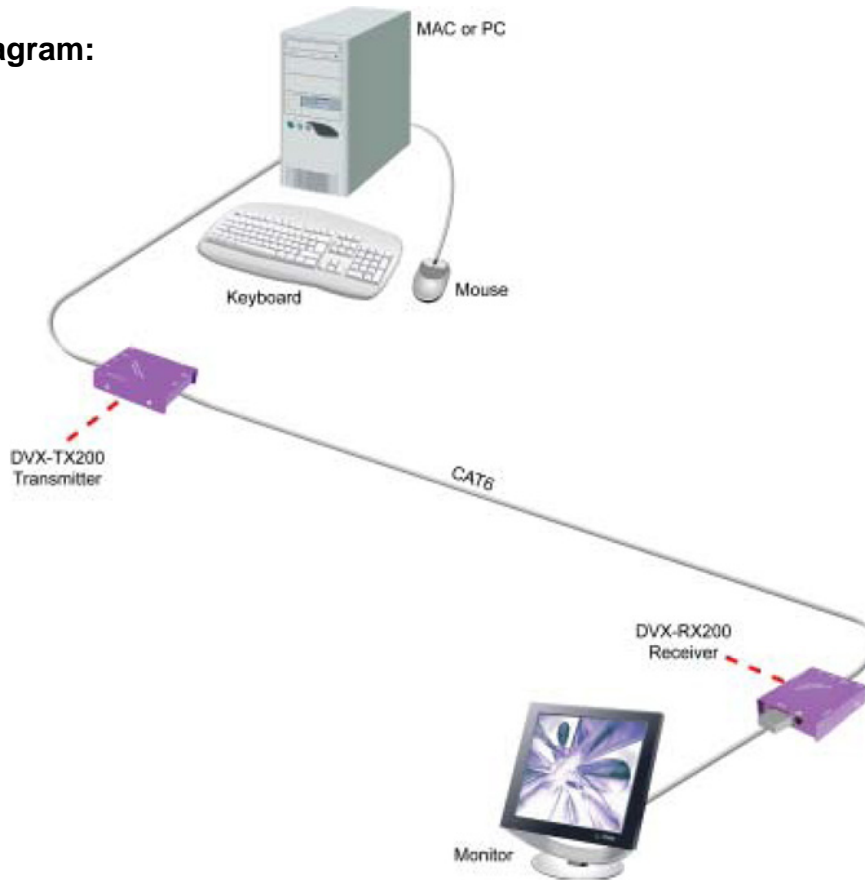
Features:

- Top Image Quality at all Resolutions
- Video Resolutions up to 1600 x 1200 @ 60Hz (1280 x 1024 @ 75Hz) on all distances up to the maximum distance
- User selectable: DCC-Information used from the remotely located Monitor, from the locally located Monitor or from an internal DDC Table
- Distances: 220 ft regular STP CAT5e or STP CAT6
- Compatible with all operating systems
- Rack Mount options (19"): Mount up to 4 devices in a 19"/1U rack mount kit. This saves expensive rack space.

GSCAT5-DVI

The DVX-200 extends any DVI-D signal up to 220 feet with a single CAT6 cable.

Application Diagram:

Application:

- Perfect Image Quality at all Resolutions
- Call Centers (co-locate user's computers)
- Industrial (protection against pollution)
- Information Terminals & Kiosks
- Airports (air traffic control, passenger information systems)
- Medical - using computer tomographs generates strong magnetic fields, which make it impossible to use monitors.

Specification	
Video Interface	DVI
Resolution	1600 x1200@60H, Resolution up to 1280x1024 min. 75H
Power Supply	Universal Switchmode PSU (90-240V Input) 5VDC
Input Interface	DVI-D (SingleLink)
Upgradable	Onboard Flash

SUNTRONIC
Outdoor LCD Signage

EMAIL: sales@suntroniclcd.com • WEB: www.SuntronicLCD.com