



Suntronic's Outdoor VideoWall Portrait Signage

Successfully launched in San Jose City College


Product Highlights:

- ▶ **High-Brightness LCD Panel (1500nits)**
- ▶ **All Weather Proof IP65 Enclosures**
- ▶ **Operating Temperature -40F To 122F**
- ▶ **Slim Bezel Thickness 30mm only**
- ▶ **Vandal Resistant Screen & housing**

Suntronic's Outdoor VideoWall in San Jose City College

SunTronic's GS product line, featuring innovative All-Weather Sunlight Readable LCD technology, provides the highest-quality Sunlight Readable image available in Outdoor Environment. These Rugged Industrial Grade Outdoor displays have the exemplary brightness and resolution you've come to expect from SunTronic. GS technology delivers stunning images for use in applications such as:

- Digital Signage
- Retail/ Restaurants
- Gas Stations
- Restaurants
- Ski Resorts
- Golf Course
- Shopping Malls
- Outdoor Signs

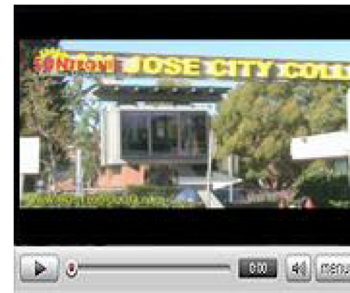

[Click here to watch video!](#)

SunTronic's technology has the unprecedented slimmest front bezel for outdoor Video Wall. In addition, Front access features for easy maintenance allows user to gain front access to valuable components, such as air conditioner, heater and LCD controller board inside the sealed enclosures, eliminating the need to remove from the wall.

Features

- High-Brightness LCD Panel (1500nits)
- All Weather Proof IP65 Enclosures
- Operating Temperature -40F To 122F
- Integrated heater and air conditioner
- Slim Bezel Thickness 18mm only

Specs:

Active area size (W x H): 102"

Pixel pitch (mm): 0.2485(H) x 0.7455(V)

Panel resolution (pixels): 1366 x 768

Luminance of white (Brightness): 1500 nits (Typ)

Contrast ratio: 3000:1

Response time (gtg): 8 ms (Typ)

Colour Range: 16.7 Million colours (max)

Viewing angle: 89/89/89/89

Video inputs: VGA; HDMI; S-Video

Auto Brightness Control: Yes (Optional)

Front glass type: strengthen 6mm AR glass

IP Class: IP65

Operating temperature range: -40 to + 95F (Direct Sunlight) /122F (Under Shaded Area)

Storage Temperature: 0 to 50C

CCFL Life: Time 60K hrs (min)

Input voltage: 110V

Weight: 70kg/195lbs

Landscape version: Please contact SuntronicLCD for details

Available Accessories: IR Remote Control VGA cable (included) and Ethernet Cable (not included)

Options: Custom Embedded PCs (please call for enquiries)

Customization: Please contact SuntronicLCD for available options

