

High Brightness Sunlight Readable Behind Window Display



Model: W4600

SUNTRONIC
Outdoor LCD Signage

Features Highlight:

- Perfect Application for Behind window displays
- 1100nits Bright Active Matrix TFT-LCD Display
- Stainless Steel Enclosures (Optional)
- 1920 x 1080 Max. Resolution
- Digital or Analog Interface
- Wide Viewing Angles 178 deg (L/R)
- Auto Dimming
- Aspect Ratio: 16:9
- Multiple Video Input Selections
- Completely Sunlight Viewable

SPECIFICATIONS:


Display Size:	46.0 Inch
Panel Type:	TFT Active
Resolution Capabilities:	1920 X 1080, VGA to WUXGA
Pixel Pitch:	0.53(H) x 053(V) mm
Viewing Angle:	Left / Right: 89°/89° Up / Down: 89°/89°
Active Area:	1018.08(H) x 572.67 (V) mm
Contrast Ratio:	Dynamitic contrast ratio: 5000:1
Brightness:	1100 nits, Completely Sunlight Viewable
Backlight:	50,000 Hours Typical
Colors Supported:	16.7 Million
Video Input:	VGA, DVI and HDMI
Power Source:	90-260 VAC
Power Consumption:	90 Watts, for complete monitor at full brightness <2 Watts Sleep Mode
Temperature:	Operating: -0° to 50°C Storage: -20° to 60°C
Humidity	Operating: 10 to 90% NC Storage: 10 to 90% NC
Response Time:	8msec typical (G-to-G)
Dimensions	With Flanges(W x H x D): TBD Without Flanges(W x H x D): 1122.0 x 666.0 x 136.0 (mm)
Weight (Without Stand)	38.0 Kgs/41.0 Kgs
Warranty:	1 year

SUNTRONIC
Outdoor LCD Signage

EMAIL: sales@suntroniclcd.com • WEB: www.SuntronicLCD.com



Mechanical Drawing:

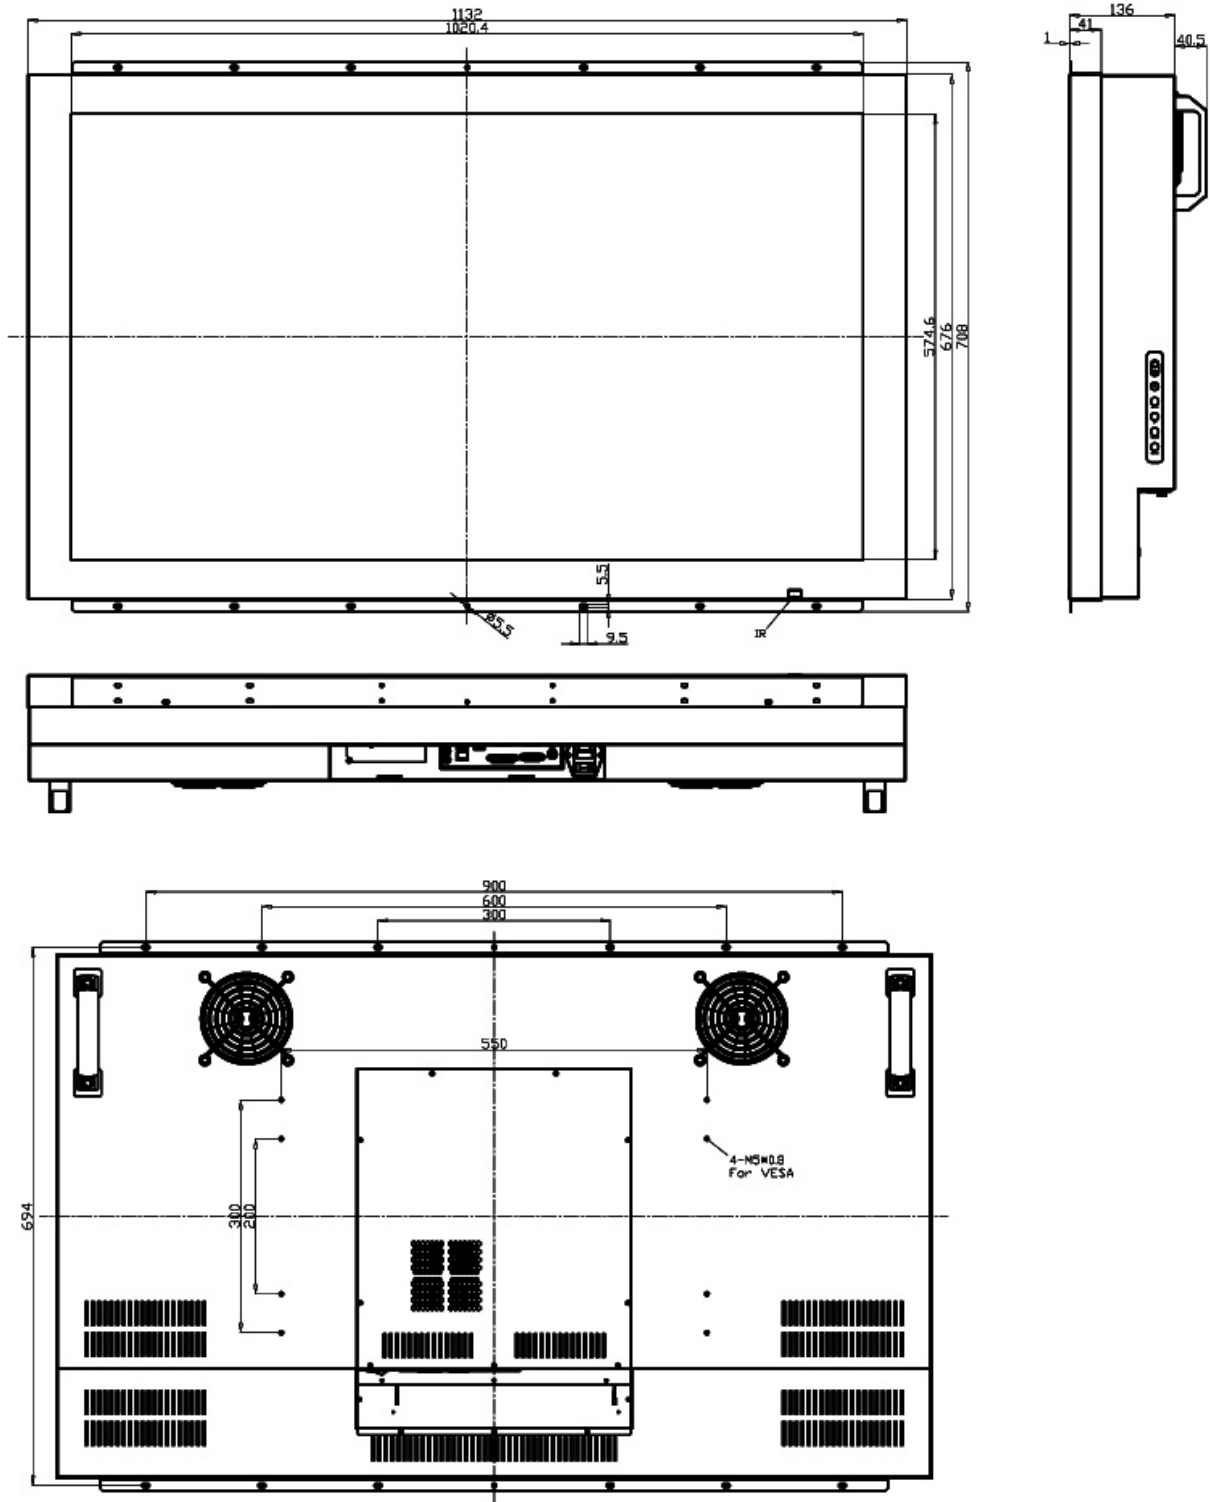

EMAIL: sales@suntroniclcd.com • WEB: www.SuntronicLCD.com

